



**TrailerBlade**<sup>TM</sup>

The logo features the brand name 'TrailerBlade' in a bold, italicized red font with a white outline, set against a white background. Below this, the word 'FLAP' is written in a white, bold, sans-serif font on a dark purple background. The entire logo is tilted slightly to the right.

**FLAP**



**Advanced Design Vented Mudflaps**

The background image shows the rear of a white semi-truck. Two large, black, vented mudflaps with a chevron-like pattern are mounted on the rear axle. The truck's taillights and bumper are visible. The sky is clear and blue.


- **Reduce fuel costs by 1%\***
- **Increase safety and fleet image by reducing spray**
- **Eliminate citations from flap sailing**
- **Built to withstand extreme conditions**



Traditional flaps disrupt the airflow around your vehicle at highway speed. This increases drag and fuel consumption. The TrailerBlade Flap is proven to reduce fuel consumption by at least 1%, typically saving 100 gallons of diesel fuel per year.

Rain, water on the road, and moisture in the air is deflected outward by traditional solid flaps and generate spray. TrailerBlade Flaps reduce spray by allowing air flow and moisture to pass through the flap.

The Chevron design of the TrailerBlade Flap also contributes to spray reduction by directing the airflow and water passing through the flap towards the road surface.

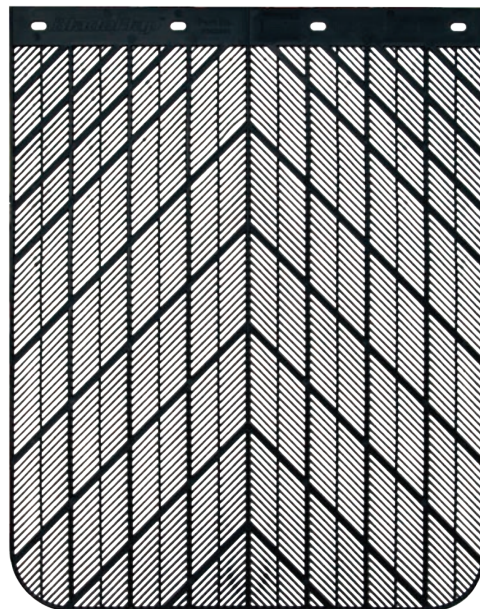

**1-844-GO-BLADE**

*\*Based on 1% fuel savings, 100,000 miles per year, 6.5 average mpg*

# Aerodynamic Advantages



*Traditional solid flaps disrupt the air flow and generate spray during wet conditions.*



*TrailerBlade Flaps allow air and water to pass through, reducing spray and aerodynamic drag.*

## TrailerBlade Flap Specifications

**Material:** Industrial grade injection molded nylon

**Chemical Resistance:** Not affected by diesel fuel, motor oil, coolant, salt acetone, detergent, or window cleaner

**Freeze Test:** -25°F (-3.9°C) for 30 days

**Mounting:** Standard mounting, trims easily

**Dimensions:** 30 in. (762mm) × 24 in. (610mm)

**Thickness:** .3125 in. (8mm)

**Weight:** 50 oz. (1.4kg)

# TrailerBlade Outperforms • Outworks • Outlasts



Nothing Beats TrailerBlade.  
Nothing.

**TrailerBlade™**

1-844-GO-BLADE • TrailerBlade.com